




Article code: DY6040

Absolutely light, our pallet DY6040 make easy lifting and carrying processes, and its configuration helps saving space during both nesting and storage.

The small size 600 x 400 is ideal for transporting and displaying products directly at the point of sale.

TECHNICAL FEATURES	VALUES	LOADING QUANTITIES	VALUES
Dimensions L x W x H (mm) Tol: ± 5 mm	600 x 400 x 117	N° of pallets per stack	432
Weight (kg) Tol: 0/+10%	1,1	Height of stack of pallets (mm)	2400
Pallet entry height (mm)	95	Stacking weight (kg)	475
Height topdeck (mm)	22	N° of pallets per truck load (on 13,6m platform)	14256
Dynamic loading* (kg)	250	N° of pallets per 20' container	4780
Static loading* (kg)	400	N° of pallets per 40' HC container	10838

*values are refered to test performed with an uniformly distributed load at room temperature (23°C) as estabilished by UNI/ISO 8611-1:2011 standard. Different conditions correspond to different values; it's necessary to test the product before use.

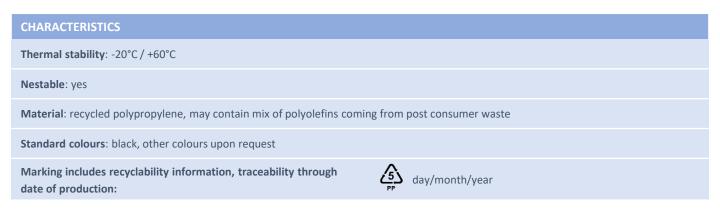

KARTON SpA Via Europa, 7 – 33077 Sacile (PN) – Italy Tel. +39 0434 788811 – Fax +39 0434 788822 info@karton.it – www.karton.it



Packaging Reference Standards

•EN 13429 Packaging. Reuse.

Pallets are designed as reusable transport packaging. It's a responsibility of the Customer to assess that the product design, as described in this specification, is fit for completing a suitable number of logistic operations and /or rotations in the normally foreseeable using conditions.

•EN 13430 Packaging. Requirements for packaging recoverable by material recycling.

Polypropylene pallets are made of thermoplastic polyolefin 100% recyclable. It's a responsibility of the Customer to assess that the product design ensures effective emptying and packaging sorting system in the normally foreseeable using conditions. The symbol associated to these products is 05 (PP), according to the dispositions of the Association of Plastic Industry.

Environmental label

