

ST 1100 Pallet for container



PRODUCT DATA SHEET ST-GQ-PLT13-GB Rev.1 05/07/23



3 runners kit



5 runners kit

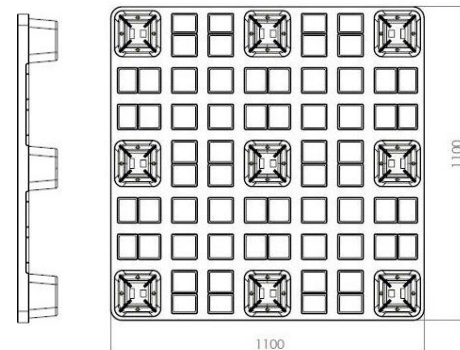

Article code: ST1100

Nestable pallet, featuring 9 feet, its lightweight construction makes it the ideal choice as an export or one-way pallet. The pallet can be entered from all 4 sides with any fork-lift. The dimension 1100 x 1100 mm is specifically designed to provide maximum use of the space for containers shipments. Made of 100% recyclable PP material.

TECHNICAL FEATURES	VALUES	LOADING QUANTITIES	VALUES
Dimensions L x W x H (mm) Tol: ± 5 mm	1100 x 1100 x 140 (160 with runners)	N° of pallets per stack	52
Weight (kg) Tol: 0/+10%	8,5	Height of stack of pallets (mm)	2500
Pallet entry height (mm)	100 (120 with runners)	Stacking weight (kg)	442
Height topdeck (mm)	40	N° of pallets per truck load (on 13,6m platform)	1248 (without runners)
Dynamic loading* (kg)	700 (without runners) 1000 (with runners)	N° of pallets per 20' container	470 (without runners)
Static loading* (kg)	2500	N° of pallets per 40' HC container	1080 (without runners)

*values are referred to test performed with an uniformly distributed load at room temperature (23°C) as established by UNI/ISO 8611-1:2011 standard. Different conditions correspond to different values; it's necessary to test the product before use.

CHARACTERISTICS

Thermal stability: -20°C / +60°C

Nestable: yes (without runners)

Material: recycled polypropylene, may contain mix of polyolefins coming from post consumer waste

Further options available: external rim (included), 3 or 5 runners (optional)

Standard colours: black, other colours upon request

Marking includes recyclability information and traceability through date of production:



day/month/year

KARTON SpA

Via Europa, 7 – 33077 Sacile (PN) – Italy
Tel. +39 0434 788811 – Fax +39 0434 788822
info@karton.it – www.karton.it

Packaging Reference Standards

•EN 13429 Packaging. Reuse.

Pallets are designed as reusable transport packaging. It's a responsibility of the Customer to assess that the product design, as described in this specification, is fit for completing a suitable number of logistic operations and /or rotations in the normally foreseeable using conditions.

•EN 13430 Packaging. Requirements for packaging recoverable by material recycling.

Polypropylene pallets are made of thermoplastic polyolefin 100% recyclable. It's a responsibility of the Customer to assess that the product design ensures effective emptying and packaging sorting system in the normally foreseeable using conditions. The symbol associated to these products is 05 (PP), according to the dispositions of the Association of Plastic Industry.

Environmental label

